

WE ARE TRANSFORMING MOBILITY THANKS TO A BLEND OF TECHNOLOGY AND ART, A COMBINATION OF NEW IDEAS AND UNIQUE DESIGN. WE ARE SHOWING THE WHOLE WORLD THAT FUNCTIONALITY CAN BE FUN AND THAT PRACTICALITY CAN ALSO BE A THING OF BEAUTY. AS YOU FLICK THE IGNITION SWITCH, WE WANT IT TO SET

OFF A REACTION, TRANSFORMING EVERY EXPERIENCE, WHETHER IT BE MONDAY MORNING, THE SCHOOL RUN, HOURS SPENT IN TRAFFIC OR A FRANTIC CALL TO PICK UP BREAD, INTO SOMETHING EXCITING. LET'S ENJOY EVEN THE MOST MUNDANE OF ROUTES AND MAKE OUR JOURNEY THE HIGHLIGHT OF THE DAY.




MP3 BUSINESS

500 ie ABS/ASR - 300 ie ABS/ASR



- ABS/ASR SYSTEM AND COMBINED BRAKING
- ELECTRONIC RIDE-BY-WIRE THROTTLE AND DUAL STD/ECO MAP (500 CC ONLY)
- STORAGE COMPARTMENT WITH USB SOCKET
- UNDERSEAT COMPARTMENT WITH ASSISTED OPENING AND CAPACITY FOR TWO FULL FACE HELMETS
- STAND-LESS PARKING SYSTEM USING THE ELECTRONIC SUSPENSION LOCK (ROLL LOCK)
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)
- PIAGGIO MP3 BUSINESS CAN BE RIDDEN, WITHIN THE LEGAL LIMITS, WITH A STANDARD CAR DRIVER'S LICENCE



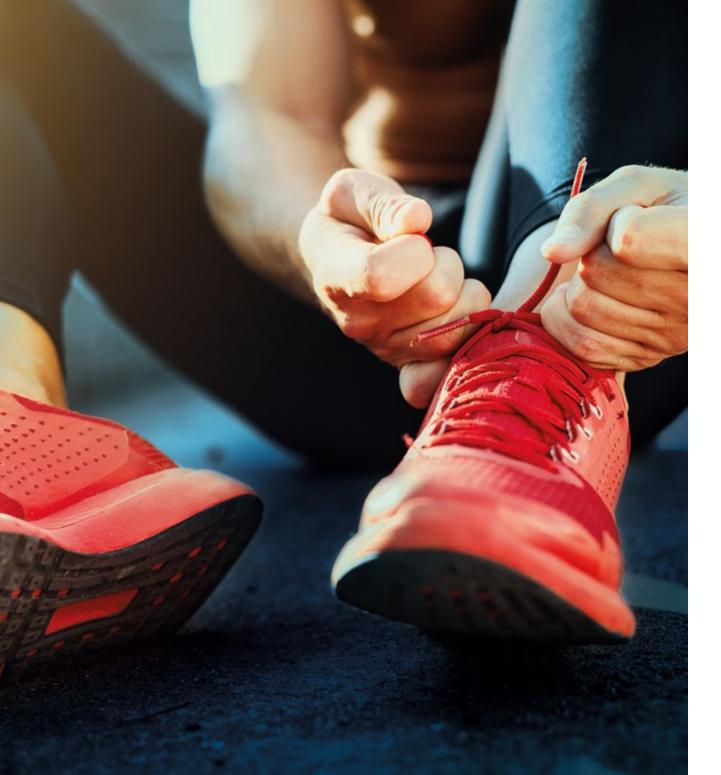

MP3 SPORT

500 ie ABS/ASR - 300 ie ABS/ASR





- ABS/ASR SYSTEM AND COMBINED BRAKING.
 PIAGGIO MP3 SPORT IS ALSO AVAILABLE WITH COMBINED BRAKING ONLY
- ELECTRONIC RIDE-BY-WIRE THROTTLE AND DUAL STD/ECO MAP (500 CC ONLY)
- STORAGE COMPARTMENT WITH USB SOCKET
- UNDERSEAT COMPARTMENT WITH ASSISTED OPENING AND CAPACITY FOR TWO FULL FACE HELMETS
- STAND-LESS PARKING SYSTEM USING THE ELECTRONIC SUSPENSION LOCK (ROLL LOCK)

- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)
- BOLD TRIMS, MATT GREY DIAMOND EDGE WHEEL RIMS AND EXCLUSIVE MATT COLOUR SCHEMES
- PIAGGIO MP3 SPORT CAN BE RIDDEN, WITHIN THE LEGAL LIMITS, WITH A STANDARD CAR DRIVER'S LICENCE
- MP3 SPECIAL EDITION IN MATT GREY WITH METALLIC RIDER FOOTPEGS, BLUE GRAPHICS AND CARBON LOOK TRIM


MP3 YOURBAN/MP3 YOURBAN SPORT

300 ie

MP3 YOURBAN MP3 YOURBAN SPORT




- EXCLUSIVE PATENTED PIAGGIO TECHNOLOGY FOR THE INDEPENDENT, SWIVELLING FRONT WHEELS
- STAND-LESS PARKING SYSTEM USING THE ELECTRONIC SUSPENSION LOCK (ROLL LOCK)
- PIAGGIO MP3 YOURBAN CAN BE RIDDEN, WITHIN THE LEGAL LIMITS, WITH A STANDARD CAR DRIVER'S LICENCE
- COMPACT DIMENSIONS FOR GREATER AGILITY IN THE CITY
- 13" FRONT WHEELS FOR INCREASED GRIP
- COMBINED BRAKING WITH TWO 258 MM FRONT DISCS
- 300 CC, 4-STROKE, 4 VALVE ELECTRONIC INJECTION ENGINE

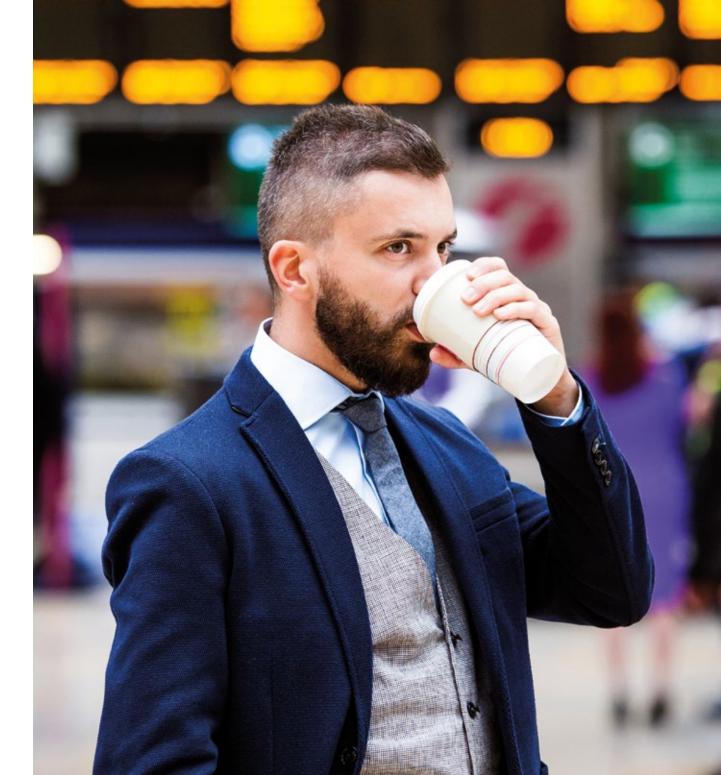



BEVERLY/BEVERLY S

300 ie ABS/ASR






- ABS/ASR SYSTEM
- SPACIOUS UNDERSEAT STORAGE COMPARTMENT WITH CAPACITY FOR TWO JET HELMETS
- RICH AND PAINSTAKINGLY CRAFTED TRIMS
- GREAT STABILITY AND RIDING EASE IN TRAFFIC


- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)



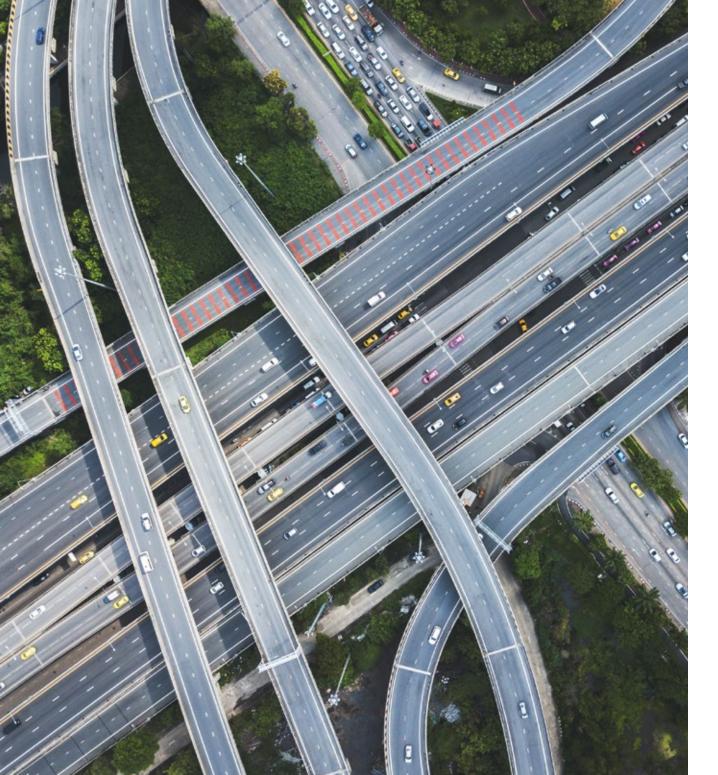

BEVERLY SPORT TOURING

350 ie ABS/ASR



brown saddle

black saddle



- ABS/ASR SYSTEM
- SPACIOUS UNDERSEAT STORAGE COMPARTMENT WITH CAPACITY FOR TWO JET HELMETS
- REFINED, SPORTY STYLE WITH SMOKED TOP FAIRING AS STANDARD
- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)

BEVERLY POLICE

350 ie ABS/ASR - 300 ie ABS/ASR



- ABS/ASR SYSTEM
- BLACK SADDLE WITH DOUBLE STITCHING IN BLUE
- GLOSSY BLACK TRIM, DIAMOND EDGE BLACK WHEEL RIMS (300 CC ONLY)
- REAR VIEW MIRRORS WITH BLUE TINTED GLASS

- EXCLUSIVE MATT COLOUR SCHEME
- USB SOCKET IN THE STORAGE COMPARTMENT
- BIKE FINDER WITH REMOTE CONTROL TO SADDLE AND INDICATORS (REMOTLY FLASHED INDICATORS FOR EASY FINDING IN PARKING LOT)





MEDLEY/MEDLEY S

150 ie ABS - 125 ie ABS







Special Edition



- ABS SYSTEM
- SPACIOUS UNDERSEAT STORAGE
 COMPARTMENT WITH CAPACITY FOR
 TWO FULL FACE HELMETS
- DISTINCTIVE STYLE AND PAINSTAKING ATTENTION TO DETAILS
- USB SOCKET IN THE STORAGE COMPARTMENT

- LIQUID-COOLED I-GET ENGINES WITH START&STOP SYSTEM
- ELECTRONIC DASHBOARD WITH TRIP COMPUTER
- MEDLEY SPECIAL EDITION IN MATT GREY WITH BLUE GRAPHICS AND CARBON LOOK TRIM


LIBERTY/LIBERTY S

150 ie ABS - 125 ie ABS - 50 ie 4T





- DASHBOARD WITH LCD DISPLAY
- ABS SYSTEM ON 125 CC AND 150 CC
- AIR-COOLED I-GET ENGINES EQUIPPED, FOR ALL ENGINE CAPACITIES, WITH ELECTRONIC INJECTION AND 3 VALVES
- LOW SADDLE UNDERSEAT COMPARTMENT WHICH CAN HOLD A JET HELMET WITH VISOR
- FRONT COMPARTMENT FOR STORAGE OF SMALL ITEMS
- LOWER SEAT TO SUIT ALL RIDERS AND FOLD-AWAY PASSENGER FOOTPEGS

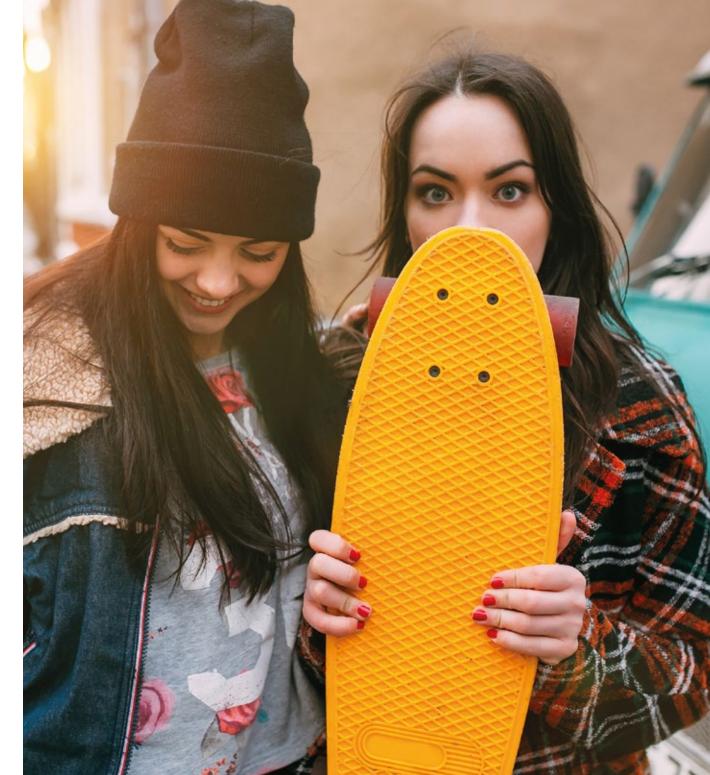





NRG POWER

50 DD





- NEW GRAPHICS
- NEW SADDLE
- SPACIOUS LINDERSEAT COMPARTMENT LARGE FNOLIGH TO HOLD A FULL-FACE HELMET
- NEW DASHBOARD WITH ANALOGUE LOOKING DIGITAL DISPLAY
- EURO 4











- COMPACT DIMENSIONS AND FLAT FOOTBOARD
- SPACIOUS UNDERSEAT COMPARTMENT, LARGE ENOUGH TO HOLD A FULL-FACE HELMET



- NEW 50 CC I-GET 4-STROKE 3 VALVE ELECTRONIC INJECTION ENGINE

- SPACIOUS UNDERSEAT COMPARTMENT, LARGE ENOUGH TO HOLD A FULL-FACE HELMET
- MAXIMUM RESPECT FOR THE ENVIRONMENT AND LOW FUEL CONSUMPTION

MP3

- Large top box kit with interface plate (can hold two full-face helmets)
- Medium top box kit with interface plate (can hold one full-face and one jet helmet)
- Quick-release thermoformed bags
- Leg cover predisposed for heating
- Heated hand grips
- Hand warmers
- Outdoor vehicle cover
- Electronic alarm
- Multimedia and GPS bracket kit
- PMP Piaggio Multimedia Platform
- Smartphone Bracket
- Comfort saddle
- Racing footpegs kit
- Modular helmet with visor and sun visor
- Full Jet helmet with sun visor

BEVERLY

- Windscreen
- Transparent or smoked top fairing
- 37 I top box
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Indoor vehicle cover
- Electronic alarm
- Saddle-handlebar anti-theft system
- Multimedia and GPS bracket
- PJ helmet with visor and sun visor
- PJ1 helmet with sun visor

LIBERTY

- Windscreen
- Transparent or smoked top fairing
- Top box (can hold one full-face helmet or two P-Style Jet helmets)
- Top box backrest to match the saddle
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- PMP Piaggio Multimedia Platform
- Bike finder
- Piaggio Sound System
- USB socket kit
- Side stand
- Rubber mat
- P-Style helmet colour matched to the scooter

NRG POWER

- Windscreen
- Top box (can hold one full-face helmet or one flip-up helmet)
- Top box mounting kit
- Saddle-handlebar anti-theft system

MEDLEY

- "Style" and "urban" windscreen
- Transparent or smoked top fairing
- Large top box kit (can hold two full-face helmets)
- Medium top box (can hold a fullface helmet or two P-Style Jet helmets)
- Top box backrest to match the saddle
- Top box bracket kit
- Leg cover
- Outdoor vehicle cover
- Saddle-handlebar anti-theft system
- Electronic alarm
- Multimedia and GPS bracket kit
- PMP Piaggio Multimedia Platform
- Piaggio Sound System
- Side stand
- Rubber mat
- P-Style helmet colour code to match the vehicle

TYPHOON

- Windscreen
- Top box kit with interface plate (can hold one full-face helmet or one flip-up helmet)
- Saddle-handlebar anti-theft system

FOR ALL VEHICLES

TomTom VIO GPS navigation system Piaggio Group special edition





	MP3 Business	
	500 ie	300 ie
Engine	Single cylinder, 4-stroke, 4 valves	Single cylinder, 4-stroke, 4 valves
Engine capacity	493 cc	278 cc
Bore x Stroke	94 mm x 71 mm	75 mm x 63 mm
Power	28.5 kW -38,.8 HP- at 7,250 rpm	15.5 kW -21.1 HP- at 7,250 rpm
Torque	45.5 Nm at 5,000 rpm	22.5 Nm at 6,000 rpm
Consumption	22.7 km/l (WMTC cycle)	27.8 km/l (WMTC cycle)
CO ₂ Emissions	102 g/km	84 g/km
Fuel system	Electronic injection	Electronic injection
Cooling	Liquid	Liquid
Lubrication	Wet sump	Wet sump
Starter	Electric	Electric
Transmission	CVT continuously variable transmission with torque server	CVT continuously variable transmission with torque server
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Double cradle in high resistance tubular steel	Double cradle in high resistance tubular steel
Front suspension	Articulated quadrilateral	Articulated quadrilateral
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload
Front brake	Two 258 mm discs with hydraulic control	Two 258 mm discs with hydraulic control
Rear brake	Ø 240 mm disc with hydraulic control	Ø 240 mm disc with hydraulic control
Braking system	Combined braking with ABS/ASR	Combined braking with ABS/ASR
Front tyre	Tubeless 110/70 - 13"	Tubeless 110/70 - 13"
Rear tyre	Tubeless 140/70 - 14"	Tubeless 140/60 - 14"
Length/ Width/Wheelbase	2,225 mm / 800 mm / 1,540 mm	2,225 mm / 800 mm / 1,500 mm
Seat height	790 mm	790 mm
Fuel tank capacity	12 litres	12 litres
Emissions compliance	EURO 4	EURO 4

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	MP3 Sport		MP3 Yourban / MP3 Yourban Sport
	500 ie	300 ie	300 ie
Engine	Single cylinder, 4-stroke, 4 valves	Single cylinder, 4-stroke, 4 valves	Single cylinder, 4-stroke, 4 valves
Engine capacity	493 cc	278 cc	278 cc
Bore x Stroke	94 mm x 71 mm	75 mm x 63 mm	75 mm x 63 mm
Power	28.5 kW -38.8 HP- at 7,250 rpm	15.5 kW -21.1 HP- at 7,250 rpm	15.5 kW -21.1 HP- at 7,250 rpm
Torque	45.5 Nm at 5,000 rpm	22.5 Nm at 6,000 rpm	22.5 Nm at 6,000 rpm
Consumption	22.7 km/l (WMTC cycle)	27.8 km/l (WMTC cycle)	30.3 km/l (WMTC cycle)
CO ₂ Emissions	102 g/km	84 g/km	76 g/km
Fuel system	Electronic injection	Electronic injection	Electronic injection
Cooling	Liquid	Liquid	Liquid
Lubrication	Wet sump	Wet sump	Wet sump
Starter	Electric	Electric	Electric
Transmission	CVT continuously variable transmission with torque server	CVT continuously variable transmission with torque server	CVT continuously variable transmission with torque server
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Double cradle in high resistance tubular steel	Double cradle in high resistance tubular steel	Double cradle in high resistance tubular steel
Front suspension	Articulated quadrilateral	Articulated quadrilateral	Articulated quadrilateral
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload
Front brake	Two 258 mm discs with hydraulic control	Two 258 mm discs with hydraulic control	Two 258 mm discs with hydraulic control
Rear brake	Two 258 mm discs with hydraulic control	Two 240 mm discs with hydraulic control	Two 240 mm discs with hydraulic control
Braking system	Combined braking with ABS/ASR**	Combined braking with ABS/ASR**	Combined braking
Front Tyre	Tubeless 110/70 - 13"	Tubeless 110/70 - 13"	Tubeless 110/70 - 13"
Rear tyre	Tubeless 140/70 - 14"	Tubeless 140/60 - 14"	Tubeless 140/60 - 14"
Length/ Width/Wheelbase	2,225 mm / 800 mm / 1.540 mm	2,225 mm / 800 mm / 1.500 mm	2,040 mm / 760 mm / 1.440 mm
Seat height	790 mm	790 mm	780 mm
Fuel tank capacity	12 litres	12 litres	11 litres
	EURO 4	EURO 4	


^{**} The Sport version is also available with combined braking only.

	BEVERLY / BEVERLY S / BEVERLY Police	BEVERLY ST / BEVERLY Police
	300 ie	350 ie
Engine	Single cylinder, 4-stroke, 4 valves	Single cylinder, 4-stroke, 4 valves
Engine capacity	278 cc	330 cc
Bore x Stroke	75 mm x 63 mm	78 mm x 69 mm
Power	15.5 kW -21 HP- at 7,250 rpm	22.2 kW -30.2 HP- at 8,250 rpm
Torque	22.5 Nm at 5,750 rpm	29 Nm at 6,250 rpm
Consumption	Electronic injection	Electronic injection
CO ₂ Emissions	30.3 Km/l (WMTC cycle)	27.8 Km/l (WMTC cycle)
Fuel system	78 g/Km	85 g/Km
Cooling	Liquid	Liquid
Lubrication	Wet sump	Wet sump
Starter	Electric	Electric
Transmission	CVT continuously variable transmission	CVT continuously variable transmission
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal multiplate wet clutch
Frame	Double cradle in high resistance tubular steel	Double cradle in high resistance tubular steel
Front suspension	Hydraulic telescopic fork	Hydraulic telescopic fork
Rear suspension	Dual hydraulic shock absorbers adjustable in preload	Dual hydraulic shock absorbers adjustable in preload
Front brake	Ø 300 mm disc with hydraulic control	Ø 300 mm disc with hydraulic control
Rear brake	Ø 240 mm disc with hydraulic control	Ø 240 mm disc with hydraulic control
Braking system	ABS/ASR	ABS/ASR
Front tyre	Tubeless 110/70 - 16"	Tubeless 110/70 - 16"
Rear tyre	Tubeless 140/70 - 14"	Tubeless 150/70 - 14"
Length/ Width/Wheelbase	2,190 mm / 780 mm / 1,535 mm	2,190 mm / 780 mm / 1,560 mm
Seat height	790 mm	790 mm
Fuel tank capacity	12.5 litres	12.5 litres
Emissions compliance	EURO 4	EURO 4

^{*} MP3 can also be ridden with a car driver's licence, in accordance with European directive 2006/126/CE, as long as the rider is at least 21 years of age, is riding in his/her home country and respects any additional national legislation. Ask your local dealer about the specific requirements in your country.

	MEDLEY / MEDLEY S	
	150 i-get ABS	125 i-get ABS
Engine	Single cylinder 4-stroke Piaggio i-get with "Start & Stop" system	Single cylinder 4-stroke Piaggio i-get with "Start & Stop" system
Engine capacity	155 cc	125 cc
Bore x Stroke	58 mm x 58.7 mm	52 mm x 58.7 mm
Max Power	11 kW at 7,750 rpm	9 kW at 8,250 rpm
Max Torque	14.4 Nm at 6,400 rpm	11.5 Nm at 6,500 rpm
Consumption	46.7 km/l (WMTC cycle)	46.3 km/l (WMTC cycle)
CO ₂ Emissions	55 g/km	53 g/km
Distribution	Single overhead camshaft (SOHC) - 4 valves	Single overhead camshaft (SOHC) - 4 valves
Cooling	Liquid	Liquid
Lubrication	Wet sump	Wet sump
Starter	Start & Stop system	Start & Stop system
Fuel system	Electronic injection	Electronic injection
Transmission	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	Single-column steel structure with pressed steel reinforcement	Single-column steel structure with pressed steel reinforcement
Front suspension	Telescopic hydraulic fork, 88 mm stroke	Telescopic hydraulic fork, 88 mm stroke
Rear suspension	Hydraulic dual action shock absorber, 5-position spring preload adjustment, 76 mm stroke	Hydraulic dual action shock absorber, 5-position spring preload adjustment, 76 mm stroke
Braking system	Two-channel ABS	Two-channel ABS
Front tyre	Tubeless 100 / 80 – 16"	Tubeless 100 / 80 – 16"
Rear tyre	Tubeless 110 / 80 - 14"	Tubeless 110 / 80 - 14"
Front brake	\emptyset 260 mm disc, with 2 x \emptyset 25.4 mm dual piston floating caliper	\emptyset 260 mm disc, with 2 x \emptyset 25.4 mm dual piston floating caliper
Rear brake	\emptyset 240 mm disc, with 2 x \emptyset 22 mm dual piston floating caliper	Ø 240 mm disc, with 2 x Ø 22 mm dual piston floating caliper
ABS	As standard	As standard
Length/ Width/Wheelbase	2,020 mm/705 mm/1,390 mm	2,020 mm/705 mm/1,390 mm
Seat height	799 mm	799 mm
Fuel tank capacity	7 litres (including 1.5 litre reserve)	7 litres (including 1.5 litre reserve)
Emissions compliance	EURO 4	EURO 4

	LIBERTY / LIBERTY S		
	150 i-get ABS	125 i-get ABS	50 i-get
Engine	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get	Single cylinder 4-stroke i-get
Engine capacity	155 cc	124 cc	49.9 cc
Bore x Stroke	58 mm x 58.6 mm	52 mm x 58.6 mm	39 mm x 41.8 mm
Max Power	9.6 kW at 7,750 rpm	8 kW at 7,500 rpm	2.4 kW at 7,500 rpm
Max Torque	13 Nm at 5,250 rpm	11 Nm at 6,000 rpm	3.1 Nm at 7,250 rpm
Consumption	36.8 Km/I (WMTC cycle)	40 Km/I (WMTC cycle)	35.71 km/l (WMTC cycle)
CO ₂ Emissions	65 g/Km	61 g/Km	62 g/km
Distribution	Single overhead camshaft, 3 valves (2 intake, 1 output)	Single overhead camshaft, 3 valves (2 intake, 1 output)	Single overhead camshaft, 3 valves (2 intake, 1 output)
Cooling	Air	Air	Air
Lubrication	Oil with wet sump	Oil with wet sump	Oil with wet sump
Fuel system	Electronic injection	Electronic injection	Electronic injection
Starter	Electric	Electric	Electric
Transmission	Automatic CVT	Automatic CVT	Automatic CVT
Clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch	Automatic centrifugal dry clutch
Frame	High resistance tubular steel	High resistance tubular steel	High resistance tubular steel
Front suspension	Telescopic hydraulic fork, 76 mm stroke	Telescopic hydraulic fork, 76 mm stroke	Telescopic hydraulic fork, 76 mm stroke
Rear suspension	Single hydraulic shock absorber with 5-position preload adjustment, 74.5 mm stroke	Single hydraulic shock absorber with 5-position preload adjustment, 74.5 mm stroke	Single hydraulic shock absorber, 73.5 mm stroke
Front tyre	Tubeless 90 / 80 - 16", 51J	Tubeless 90 / 80 - 16", 51J	Tubeless 90 / 80 - 16", 51J
Rear tyre	Tubeless 100 / 80 - 14", 54J	Tubeless 100 / 80 - 14", 54J	Tubeless 100 / 80 - 14", 54J
Front brake	Disco singolo Ø 240 mm	Disco singolo Ø 240 mm	Disco singolo Ø 240 mm
Rear brake	Tamburo Ø 140 mm	Tamburo Ø 140 mm	Tamburo Ø 140 mm
4BS	As standard	As standard	-
Length/ Width/Wheelbase	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,340 mm	1,945 mm / 690 mm / 1,370 mm
Seat height	< 790 mm	< 790 mm	780 mm
Fuel tank capacity	6 I (including 1.5 I reserve)	6 I (including 1.5 I reserve)	6 I (including 1.5 I reserve)
Emissions compliance	EURO 4	EURO 4	EURO 4

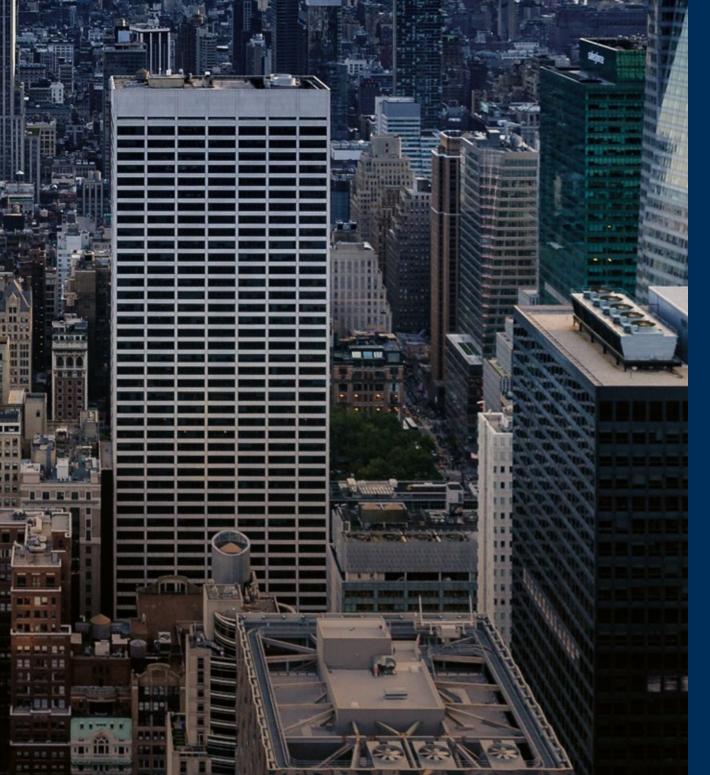

The company reserves the right to make technical and aesthetic changes at any time. Ride carefully, always wearing a helmet and suitable gear.

Always comply with the rules of the road and respect the environment. Read the operating and maintenance manual carefully. Always ask for original and approved spare parts in accordance with prevailing standards. See your Official Piaggio Dealership and Authorised Retailers for a secure purchase and guaranteed service support. Original Piaggio spare parts are a guarantee of quality and ensure that vehicle performance remains unaltered.

QUALITY SYSTEM CERTIFIED BY DNV =ISO 9001=

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV
CERTIFIED BY DNV
CERTIFIED BY DNV =ISO 14001=

= OHSAS 18001=

Piaggio is a registered trademark of Piaggio & C. S.p.A.

DEALERSHIP STAMP

